


UtiliTough.com 1425 Wilson Road Newberry, SC 29108 803.597.6890 FrontDesk@UtiliTough.com

HYDRAULIC BRUSH CUTTERS



POWER. PRODUCTIVITY. PROVEN PERFORMANCE.

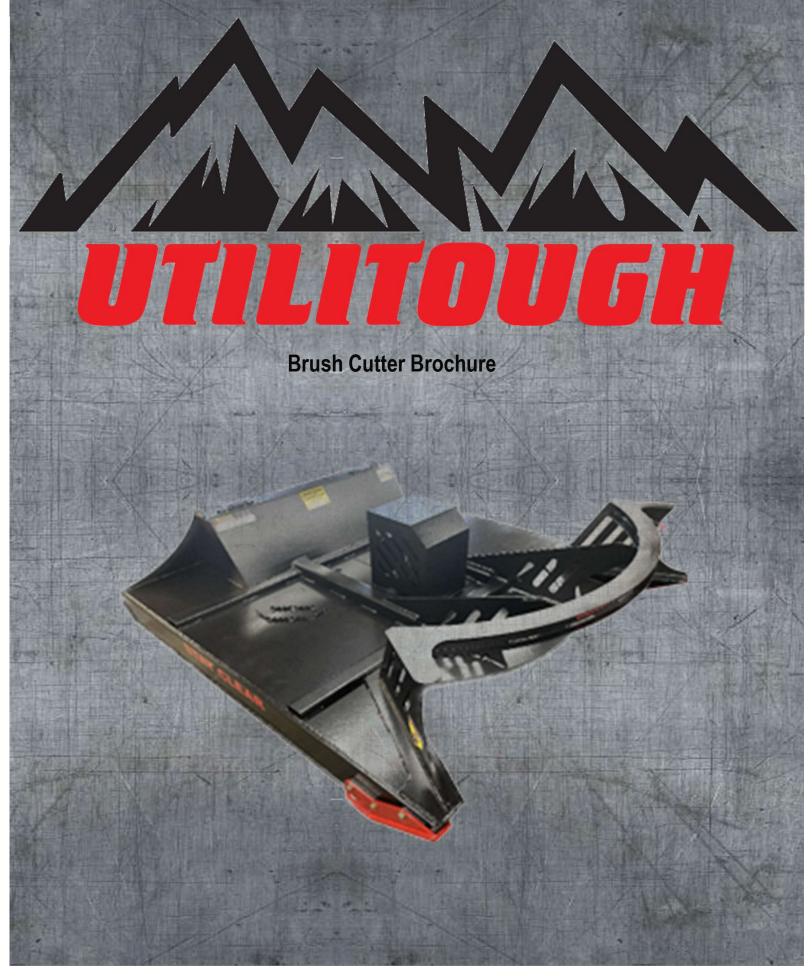

Mini Skid Steer Brush Cutter

- Available in 42" and 48"
- 42" built for mini skid steer hitch only
- 48" available in both mini and full-size skid steer hitch
- Available in low flow and standard flow
- 3/16" reinforced steel deck
- 1/2" blade carrier plate
- High strength push bar on front
- Motor cover for added protection
- Reversible, replaceable, bi-directional AR 500 hardened steel blades
- Includes hydraulic hoses and fittings
- 1 year warranty
- Warranty does not cover blades or hoses



*42" shown with mini skid steer (Dingo) hitch



Overall Dimensions: 42" cutter: 48.5" (W) x 51" (D) x 22" (H) 48" cutter: 54" (W) x 57" (D) x 22" (H)

*48" shown with skid steer hitch

			Cutting				
		# of	Capacity			Oil Flow	Est.
Model #	Description	Blades	Diameter	Hose Size	Motor	Required	Weight
1BCMNSSLF42	42" Mini Skid Steer Low Flow Brush Cutter	2					373
1BCMNSSLF48	48" Mini Skid Steer Low Flow Brush Cutter	3			2K-80cc	14-20 GPM	426
	42" Mini Skid Steer Standard Flow Brush		3"	.63" x 117"			
1BCMNSSSF42	Cutter	2	5	.05 X 117			373
	48" Mini Skid Steer Standard Flow Brush						
1BCMNSSSF48	Cutter	3			2K-130cc	18-25 GPM	426

Replacement blade kit for 42" cutter includes: 2 blades, bolts and nuts; must be welded Replacement blade kit for 48" cutter includes: 3 blades, bolts, and nuts; must be welded (Must buy entire kit for safety purposes)



Xtreme Skid Steer Brush Cutter

- Available in 60" and 72"
- Available in standard flow and mid flow
- 1/4" reinforced steel deck
- Eaton direct drive hydraulic motor
- 3,000 PSI relief valve
- High strength push bar on front
- Motor cover for added protection
- Reversible, replaceable, bi-directional AR 5(hardened steel blades
- Dual 3/8" blade carrier plates
- 7-1/4" deck height
- Includes hydraulic hoses and fittings
- 1 year warranty
- Warranty does not cover blades or hoses



Safety Chain included with all skid steer models to secure on the host machine to limit the height that the cutter can be raised.



Powered by



Overall Dimensions: 60" cutter: 75" (W) x 68" (D) x 22" (H) 72" cutter: 82.5" (W) x 80" (D) x 22" (H)

			Cutting Capacity					
		# of	Diamete				Oil Flow	Est.
Model #	Description	Blades	r	Hose Size	Tip Speed	Motor	Required	Weight
1BCSF60	60" Skid Steer Standard Flow Cutter							1380
1BCSF60T	60" Skid Steer Standard Flow Cutter w/ Teeth							1430
1BCSF72	72" Skid Steer Standard Flow Cutter							1500
1BCSF72T	72" Skid Steer Standard Flow Cutter w/ Teeth	3	7"	.63" x 117"	8,500-	2K-130cc	18-25 GPM	1550
1BCMF60	60" Skid Steer Mid Flow Cutter	3		.03 X 117	10,000			1380
1BCMF60T	60" Skid Steer Mid Flow Cutter w/ Teeth							1430
1BCMF72	72" Skid Steer Mid Flow Cutter]						1500
1BCMF72T	72" Skid Steer Mid Flow Cutter w/ Teeth					4K-160cc	22-30 GPM	1550

Replacement blade kit for 60" cutter includes: 3 blades, bolts and nuts; must be welded Replacement blade kit for 72" cutter includes: 3 blades, bolts, and nuts; must be welded (Must buy entire kit for safety purposes)

UtiliTough.com 1425 Wilson Road Newberry, SC 29108 803.597.6890 carmen@utilitough.com, shannon@utilitough.com, frontdesk@utilitough.com



Xtreme High Flow Skid Steer Brush Cutter

- Available in 72"
- 1/4" reinforced steel deck
- Eaton direct drive hydraulic motor
- 3,000 PSI relief valve
- High strength push bar on front
- Motor cover for added protection
- Reversible, replaceable, bi-directional AR 500 hardened steel blades
- Dual 3/8" blade carrier plates
- 7-1/4" deck height
- Includes hydraulic hoses and fittings
- 3 year warranty
- Warranty does not cover blades or hoses



Safety Chain included with all skid steer nodels to secure on the host machine to limit the height that the cutter can be raised.



Direct Drive Hydraulic Motor



Overall Dimensions: 60" cutter: 75" (W) x 68" (D) x 22" (H) 72" cutter: 82.5" (W) x 80" (D) x 22" (H)

			Cutting					
		# of	Capacity				Oil Flow	Est.
Model #	Description	Blades	Diameter	Hose Size	Tip Speed	Motor	Required	Weight
1BCHF72	72" Skid Steer High Flow Cutter	2	7"	.75" x 117"	8,500-	CK 225 cc	20 45 CDM	1500
1BCHF72T	72" Skid Steer High Flow Cutter w/ Teeth	3	1	./5 X 11/	14,000	01-22500	30-45 GPM	1500 1550

Replacement blade kit for 72" cutter includes: 3 blades, bolts, and nuts; must be welded (Must buy entire kit for safety purposes)

UtiliTough.com 1425 Wilson Road Newberry, SC 29108 803.597.6890 carmen@utilitough.com, shannon@utilitough.com, frontdesk@utilitough.com



Mini Excavator Brush Cutter

- Available in 42" and 48"
- Available in low flow, standard flow, and mid flow
- 1/4" A36 reinforced steel deck
- 1/2" blade carrier plate
- 6" deck height
- Removable bolt-on side protection shield
- Includes hydraulic hoses and fittings
- 1 year warranty
- Warranty does not cover blades or hoses





Direct Drive Hydraulic Motor

Overall Dimensions: 42" cutter: 47" (W) x 47" (D) x 24" (H) 48" cutter: 53" (W) x 53" (D) x 24" (H)

48° CL	itter: 53° (W) x 53° (D) x 24° (H)		Cutting					
		# of	Capacity				Oil Flow	Est.
Model #	Description	Blades	Diameter	Hose Size	Tip Speed	Motor	Required	Weight
1BCEXLF42	42" Excavator Low Flow Brush Cutter	2						804
1BCEXLF48	48" Excavator Low Flow Brush Cutter	3				2K-80cc	14-20 GPM	860
	42" Excavator Standard Flow Brush				8,500-			
1BCEXSF42	Cutter	2	4"	.63" x 117"	10,000			804
	48" Excavator Standard Flow Brush				10,000			
1BCEXSF48	Cutter	3				2K-130cc	18-25 GPM	860
1BCEXMF48	48" Excavator Mid Flow Brush Cutter	3				4K-160cc	22-30 GPM	860

~ · · ·

*Specify make and model of host machine, quick attach or pin-on mounting bracket when placing order

Replacement blade kit for 42" cutter includes: 2 blades, bolts and nuts; must be welded Replacement blade kit for 48" cutter includes: 3 blades, bolts, and nuts; must be welded (Must buy entire kit for safety purposes)



Mini Excavator Brush Cutter

- Available in 42" and 48"
- Available in low flow, standard flow, and mid flow
- 1/4" A36 reinforced steel deck
- Includes hydraulic hoses and fittings
- 1 year warranty
- Warranty does not cover blades or hoses





			Cutting	# of				
		# of	Capacity	Mulching	Hose		Oil Flow	Est.
Model #	Description	Blades	Diameter	Teeth	Size	Motor	Required	Weight
	42" Excavator Low Flow Open Front Brush Cutter w/							
1BCEXLFX42T	Teeth	3						804
	48" Excavator Low Flow Open Front Brush Cutter w/						14-20	
1BCEXLFX48T	Teeth	3				2K-80cc	GPM	860
	42" Excavator Standard Flow Open Front Brush		4"	9	.63" x			
1BCEXSFX42T	Cutter w/ Teeth	3	4	9	117"			804
	48" Excavator Standard Flow Open Front Brush						18-25	
1BCEXSFX48T	Cutter w/ Teeth	3				2K-130cc	GPM	860
	48" Excavator Mid Flow OpenFront Brush Cutter w/						22-30	
1BCEXMFX48T	Teeth	3				4K-160cc	GPM	860

*Specify make and model of host machine, quick attach or pin-on mounting bracket when placing order

> Replacement blade kit for 42" cutter includes: 2 blades, bolts and nuts; must be welded Replacement blade kit for 48" cutter includes: 3 blades, bolts, and nuts; must be welded (Must buy entire kit for safety purposes)